


TDC Power Products Co.,Ltd
Cheng Yen Electronic Co.,Ltd

DA-09-08

INPUT VOLTAGE **120VAC**
OUTPUT VOLTAGE **8VAC**

ELECTRICAL & MECHANICAL SPECIFICATION

UL
LISTED
E149474
3G58

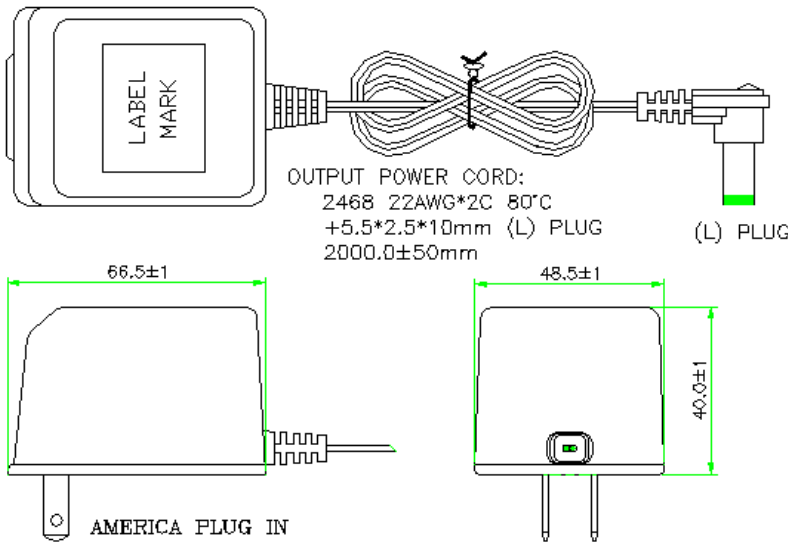

ELECTRONICAL SPECIFICATION

Input Voltage	120	Volts
Frequency (Hz)	60	Hz
Power Rated (W)	10	W
Exciting Current With No load	50	mA Max
Exciting Current With Full load	90	mA Max
Output Voltage	8.0	Volts±5%
Output Current	1.0	Amp±5%
Output Voltage Without Load	9.8	Volts±5%
Voltage Range at Rated (Output)	7.6~8.4	Volts
Current Range at Rated (Output)	0.95~1.05	Amp
HI-POT :		
Leakage Current	0.5	m A
Test Time	1	Min
PRI TO SEC	1250	Volts
PRI TO CORE	1250	Volts
SEC TO CORE	1250	Volts
Efficiency	70	%
Insulation Class	B (130)	°C

MECHANICAL SPECIFICATION

Dimensions (L*W*H)	66.5*48.5*40.0	mm
Weight	247	g
Environment:		
Operating Temperature	-10 To 40	°C
Storage Temperature	-20 To 70	°C
Relative Temperature 40°C±2°C		
RELATIVE HUMIDITY	90% RH	

Output Cable: **2468 #22AWG*2C 80 °C**
2.0M LENGTH+5.5*2.5*10 (L)PLUG

ELECTRICAL CIRCUIT

